



Security Seals®



TF "Olga & Co", 105-B, Levitana Street, Odessa, 65114, Ukraine

Tel/fax: (048) 728-3000, 746-29-76, 746-35-39, E-mail: [info@crystalseal.com](mailto:info@crystalseal.com), <http://www.crystalseal.com>

### **“BARRIER” Security Seal - Label**

“BARRIER” number indicator seal – label is designed for protecting such objects as dial mechanisms of utility meters, electrical boxes, gears, equipment, switching centers, sensors, rooms, reservoirs and many other objects, breach pieces of which don't have seal holes, against illegal access.



### **Advantages of “BARRIER” Security Seal – Label:**



- ✓ 7 (seven) levels of protection!
- ✓ Presence of sticker effect!
- ✓ Presence of stretch - effect!
- ✓ High sensitivity!
- ✓ High ability to indicate!
- ✓ Ease of transportation!
- ✓ Ease of mounting

## **7 (Seven) Levels of Protection of “BARRIER” Security Seal – Label:**



1. Seven-digit sequential number
2. Using consecutive non-recurring numbering
3. Placing the number and logotype by one-way method, excluding possibility to change them
4. Appearing, when ungluing from the sealed surface, “OPENED” hidden inscription, not disappearing by repeated gluing.
5. Number and logotype, destroyed when removing the seal from sealed surface
6. Relief top layer disappearing by action of spirits or reducers
7. Adhesive compound stable to temperature action!

## **Technical Characteristics of “BARRIER” Security Seal – Label:**

Dimensions: length – 45 mm; width – 18 mm (individual order of dimensions is possible).

Color: dark blue.

Placing the number: interface, not using colorants (7 digits)

Placing the logotype: interface, not using colorants (alphanumeric, up to 12 digits)

Surfaces being sealed: plastic, metal, glass, paper, polished wood, painted surfaces.


Temperature range of the unit: +5°C...+50°C.

Period of binding with the sealed surface: 5 minutes.

Temperature range of using: -50°C...+100°C.

## **Rules of “BARRIER” Security Seal – Label Installation:**

1. Clear the sealed surfaces to be without contaminants, fats, humidity.
2. Remove the seal – label from the basis.
3. Place the seal – label on the sealed surface and smooth out.

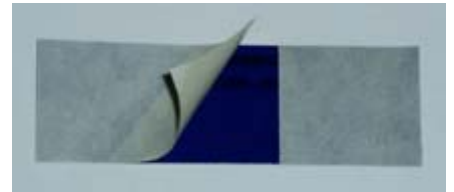

## **Rules of Checking a Placed “BARRIER” Seal – Label:**

1. Check correspondence of number and logotype of the examined seal – label to the number and logotype mentioned in the log.
2. Check absence of traces of action on the seal – label and absence of developing process of “OPENED” hidden inscription.
3. When removing a seal – label check developing process of “BCKPЫTO OPENED” hidden inscription.

## **Recordkeeping Rules of “BARRIER” Seal – Label:**

Numbers of all the placed (removed) seals should be entered in the log containing the following information:

- Location of placing (removing) the seal
- Date and time of placing (removing) the seal
- Instrument number and readings, container number, etc.
- Name and signature of the person who placed (removed) the seal.
- Name and signature of the person who inspected the object of sealing.

## **Conditions of Ordering “BARRIER” Seal – Label\*:**

Order of “BARRIER” security seal – labels is accepted in accordance of any findings of examining a written application of the customer (being a juridical person) containing the following information:

1. Name, signature, requisites of an enterprise – customer
2. Name and type of object of sealing
3. The volume of non-recurring supply (pieces)
4. Exercising date of supply
5. Logotype (alphanumeric).

**\* It is impossible to order seal enumeration. Seals are supplied with continuous, sequential, non-recurring numbering.**

## **Warranties:**

1. Security Seals® guarantees absence of possibility to open and place again “BARRIER” security seal - label illegally without making traces!
2. Security Seals® guarantees absence of possibility to produce “BARRIER” security seal – label illegally!

*Protecting your interests we care for our reputation!*

